


Steel wire rope veropower 8

Product information



Wire rope construction: veropower 8 is a rotary swaged 8-strand, non-rotation-resistant rope in parallel lay construction with compacted outerstrands and a rope core covered with a plastic layer. It provides the highest breaking strength of all non rotation-resistant wire ropes and offers superior resistance to drum crushing.

Features:

- All strands are compacted and rotary swaged.
- Extremely high breaking strength and is very resistant against abrasion.
- Suitable for multi layer spooling systems with guided loads.
- Fully lubricated

ISO 4309

Rope Category No: Up to 40mm **RCN.09**, 41-46mm **RCN.11**, > 46mm **RCN.13**.


Marking: According to standard

Standard: EN 12385-4


Warning: veropower 8 may not be used with a swivel.

RCN: 09

Tolerance Ø: +2% to +4%

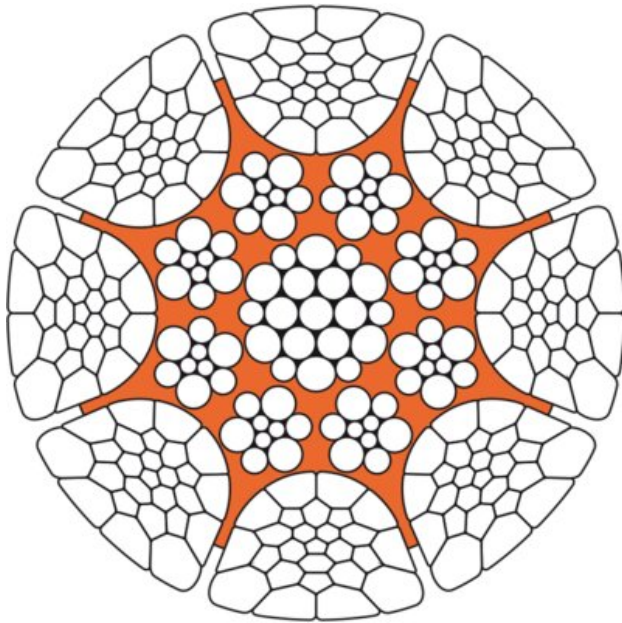

Overhead cranes



Mobile port crane



Offshore crane



Loading crane



Crawler crane



Container crane



Piling crane



Tower crane



Ladle crane



STS crane



Part Code	Rope Diameter, mm	Tensile strength N/mm ²	Finish	Rope lay.	Min. Breaking force, kN	Steel area mm ²	Lubrication	Weight kg/100m	Delivery time
103101204070279	12	1,960	Bright	sZ	147.4	84	SupplierStandard	72	7
103101203070279	12	1,960	Bright	zS	147.4	84	SupplierStandard	72	7
103101204270279	12	1,960	Galvanized	sZ	147.4	84	SupplierStandard	72	7
103101203270279	12	1,960	Galvanized	zS	147.4	84	SupplierStandard	72	7
103101204100279	12	2,160	Bright	sZ	158.8	84	SupplierStandard	72	7
103101203100279	12	2,160	Bright	zS	158.8	84	SupplierStandard	72	7
103101204300279	12	2,160	Galvanized	sZ	158.8	84	SupplierStandard	72	7
103101203300279	12	2,160	Galvanized	zS	158.8	84	SupplierStandard	72	7
103101304070279	13	1,960	Bright	sZ	173	99	SupplierStandard	84	7
103101303070279	13	1,960	Bright	zS	173	99	SupplierStandard	84	7
103101304270279	13	1,960	Galvanized	sZ	173	99	SupplierStandard	84	7
103101303270279	13	1,960	Galvanized	zS	173	99	SupplierStandard	84	7
103101304100279	13	2,160	Bright	sZ	186.4	99	SupplierStandard	84	7
103101303100279	13	2,160	Bright	zS	186.4	99	SupplierStandard	84	7
103101304300279	13	2,160	Galvanized	sZ	186.4	99	SupplierStandard	84	7
103101303300279	13	2,160	Galvanized	zS	186.4	99	SupplierStandard	84	7
103101404070279	14	1,960	Bright	sZ	200.6	115	SupplierStandard	98	7
103101403070279	14	1,960	Bright	zS	200.6	115	SupplierStandard	98	7

103101404270279	14	1,960	Galvanized	sZ	200.6	115	SupplierStandard	98	7
103101403270279	14	1,960	Galvanized	zS	200.6	115	SupplierStandard	98	7
103101404100279	14	2,160	Bright	sZ	216.2	115	SupplierStandard	98	7
103101403100279	14	2,160	Bright	zS	216.2	115	SupplierStandard	98	7
103101404300279	14	2,160	Galvanized	sZ	216.2	115	SupplierStandard	98	7
103101403300279	14	2,160	Galvanized	zS	216.2	115	SupplierStandard	98	7
103101504070279	15	1,960	Bright	sZ	230.3	132	SupplierStandard	112	7
103101503070279	15	1,960	Bright	zS	230.3	132	SupplierStandard	112	7
103101504270279	15	1,960	Galvanized	sZ	230.3	132	SupplierStandard	112	7
103101503270279	15	1,960	Galvanized	zS	230.3	132	SupplierStandard	112	7
103101504100279	15	2,160	Bright	sZ	248.2	132	SupplierStandard	112	7
103101503100279	15	2,160	Bright	zS	248.2	132	SupplierStandard	112	7
103101504300279	15	2,160	Galvanized	sZ	248.2	132	SupplierStandard	112	7
103101503300279	15	2,160	Galvanized	zS	248.2	132	SupplierStandard	112	7
103101604070279	16	1,960	Bright	sZ	262	150	SupplierStandard	128	7
103101603070279	16	1,960	Bright	zS	262	150	SupplierStandard	128	7
103101604270279	16	1,960	Galvanized	sZ	262	150	SupplierStandard	128	7
103101603270279	16	1,960	Galvanized	zS	262	150	SupplierStandard	128	7
103101604100279	16	2,160	Bright	sZ	282.3	150	SupplierStandard	128	7
103101603100279	16	2,160	Bright	zS	282.3	150	SupplierStandard	128	7
103101604300279	16	2,160	Galvanized	sZ	282.3	150	SupplierStandard	128	7
103101603300279	16	2,160	Galvanized	zS	282.3	150	SupplierStandard	128	7
103101704070279	17	1,960	Bright	sZ	296.8	170	SupplierStandard	144	7

103101703070279	17	1,960	Bright	zS	296.8	170	SupplierStandard	144	7
103101704270279	17	1,960	Galvanized	sZ	296.8	170	SupplierStandard	144	7
103101703270279	17	1,960	Galvanized	zS	296.8	170	SupplierStandard	144	7
103101704100279	17	2,160	Bright	sZ	318.7	170	SupplierStandard	144	7
103101703100279	17	2,160	Bright	zS	318.7	170	SupplierStandard	144	7
103101704300279	17	2,160	Galvanized	sZ	318.7	170	SupplierStandard	144	7
103101703300279	17	2,160	Galvanized	zS	318.7	170	SupplierStandard	144	7
103101804070279	18	1,960	Bright	sZ	331.6	190	SupplierStandard	161	7
103101803070279	18	1,960	Bright	zS	331.6	190	SupplierStandard	161	7
103101804270279	18	1,960	Galvanized	sZ	331.6	190	SupplierStandard	161	7
103101803270279	18	1,960	Galvanized	zS	331.6	190	SupplierStandard	161	7
103101804100279	18	2,160	Bright	sZ	357.3	190	SupplierStandard	161	7
103101803100279	18	2,160	Bright	zS	357.3	190	SupplierStandard	161	7
103101804300279	18	2,160	Galvanized	sZ	357.3	190	SupplierStandard	161	7
103101803300279	18	2,160	Galvanized	zS	357.3	190	SupplierStandard	161	7
103101904070279	19	1,960	Bright	sZ	369.5	212	SupplierStandard	180	7
103101903070279	19	1,960	Bright	zS	369.5	212	SupplierStandard	180	7
103101904270279	19	1,960	Galvanized	sZ	369.5	212	SupplierStandard	180	7
103101903270279	19	1,960	Galvanized	zS	369.5	212	SupplierStandard	180	7
103101904100279	19	2,160	Bright	sZ	398.1	212	SupplierStandard	180	7
103101903100279	19	2,160	Bright	zS	398.1	212	SupplierStandard	180	7
103101904300279	19	2,160	Galvanized	sZ	398.1	212	SupplierStandard	180	7
103101903300279	19	2,160	Galvanized	zS	398.1	212	SupplierStandard	180	7

103102004070279	20	1,960	Bright	sZ	409.4	235	SupplierStandard	199	7
103102003070279	20	1,960	Bright	zS	409.4	235	SupplierStandard	199	7
103102004270279	20	1,960	Galvanized	sZ	409.4	235	SupplierStandard	199	7
103102003270279	20	1,960	Galvanized	zS	409.4	235	SupplierStandard	199	7
103102004100279	20	2,160	Bright	sZ	441.2	235	SupplierStandard	199	7
103102003100279	20	2,160	Bright	zS	441.2	235	SupplierStandard	199	7
103102004300279	20	2,160	Galvanized	sZ	441.2	235	SupplierStandard	199	7
103102003300279	20	2,160	Galvanized	zS	441.2	235	SupplierStandard	199	7
103102104070279	21	1,960	Bright	sZ	451.3	259	SupplierStandard	220	7
103102103070279	21	1,960	Bright	zS	451.3	259	SupplierStandard	220	7
103102104270279	21	1,960	Galvanized	sZ	451.3	259	SupplierStandard	220	7
103102103270279	21	1,960	Galvanized	zS	451.3	259	SupplierStandard	220	7
103102104100279	21	2,160	Bright	sZ	486.4	259	SupplierStandard	220	7
103102103100279	21	2,160	Bright	zS	486.4	259	SupplierStandard	220	7
103102104300279	21	2,160	Galvanized	sZ	486.4	259	SupplierStandard	220	7
103102103300279	21	2,160	Galvanized	zS	486.4	259	SupplierStandard	220	7
103102204070279	22	1,960	Bright	sZ	495.3	284	SupplierStandard	241	7
103102203070279	22	1,960	Bright	zS	495.3	284	SupplierStandard	241	7
103102204270279	22	1,960	Galvanized	sZ	495.3	284	SupplierStandard	241	7
103102203270279	22	1,960	Galvanized	zS	495.3	284	SupplierStandard	241	7
103102204100279	22	2,160	Bright	sZ	533.8	284	SupplierStandard	241	7
103102203100279	22	2,160	Bright	zS	533.8	284	SupplierStandard	241	7
103102204300279	22	2,160	Galvanized	sZ	533.8	284	SupplierStandard	241	7

103102203300279	22	2,160	Galvanized	zS	533.8	284	SupplierStandard	241	7
103102304070279	23	1,960	Bright	sZ	541.4	310	SupplierStandard	264	7
103102303070279	23	1,960	Bright	zS	541.4	310	SupplierStandard	264	7
103102304270279	23	1,960	Galvanized	sZ	541.4	310	SupplierStandard	264	7
103102303270279	23	1,960	Galvanized	zS	541.4	310	SupplierStandard	264	7
103102304100279	23	2,160	Bright	sZ	583.4	310	SupplierStandard	264	7
103102303100279	23	2,160	Bright	zS	583.4	310	SupplierStandard	264	7
103102304300279	23	2,160	Galvanized	sZ	583.4	310	SupplierStandard	264	7
103102303300279	23	2,160	Galvanized	zS	583.4	310	SupplierStandard	264	7
103102404070279	24	1,960	Bright	sZ	589.5	338	SupplierStandard	287	7
103102403070279	24	1,960	Bright	zS	589.5	338	SupplierStandard	287	7
103102404270279	24	1,960	Galvanized	sZ	589.5	338	SupplierStandard	287	7
103102403270279	24	1,960	Galvanized	zS	589.5	338	SupplierStandard	287	7
103102404100279	24	2,160	Bright	sZ	635.3	338	SupplierStandard	287	7
103102403100279	24	2,160	Bright	zS	635.3	338	SupplierStandard	287	7
103102404300279	24	2,160	Galvanized	sZ	635.3	338	SupplierStandard	287	7
103102403300279	24	2,160	Galvanized	zS	635.3	338	SupplierStandard	287	7
103102504070279	25	1,960	Bright	sZ	639.6	367	SupplierStandard	311	7
103102503070279	25	1,960	Bright	zS	639.6	367	SupplierStandard	311	7
103102504270279	25	1,960	Galvanized	sZ	639.6	367	SupplierStandard	311	7
103102503270279	25	1,960	Galvanized	zS	639.6	367	SupplierStandard	311	7
103102504100279	25	2,160	Bright	sZ	689.3	367	SupplierStandard	311	7
103102503100279	25	2,160	Bright	zS	689.3	367	SupplierStandard	311	7

103102504300279	25	2,160	Galvanized	sZ	689.3	367	SupplierStandard	311	7
103102503300279	25	2,160	Galvanized	zS	689.3	367	SupplierStandard	311	7
103102604070279	26	1,960	Bright	sZ	691.8	397	SupplierStandard	337	7
103102603070279	26	1,960	Bright	zS	691.8	397	SupplierStandard	337	7
103102604270279	26	1,960	Galvanized	sZ	691.8	397	SupplierStandard	337	7
103102603270279	26	1,960	Galvanized	zS	691.8	397	SupplierStandard	337	7
103102604100279	26	2,160	Bright	sZ	745.6	397	SupplierStandard	337	7
103102603100279	26	2,160	Bright	zS	745.6	397	SupplierStandard	337	7
103102604300279	26	2,160	Galvanized	sZ	745.6	397	SupplierStandard	337	7
103102603300279	26	2,160	Galvanized	zS	745.6	397	SupplierStandard	337	7
103102704070279	27	1,960	Bright	sZ	746.1	428	SupplierStandard	363	7
103102703070279	27	1,960	Bright	zS	746.1	428	SupplierStandard	363	7
103102704270279	27	1,960	Galvanized	sZ	746.1	428	SupplierStandard	363	7
103102703270279	27	1,960	Galvanized	zS	746.1	428	SupplierStandard	363	7
103102704100279	27	2,160	Bright	sZ	804	428	SupplierStandard	363	7
103102703100279	27	2,160	Bright	zS	804	428	SupplierStandard	363	7
103102704300279	27	2,160	Galvanized	sZ	804	428	SupplierStandard	363	7
103102703300279	27	2,160	Galvanized	zS	804	428	SupplierStandard	363	7
103102804070279	28	1,960	Bright	sZ	802.4	460	SupplierStandard	391	7
103102803070279	28	1,960	Bright	zS	802.4	460	SupplierStandard	391	7
103102804270279	28	1,960	Galvanized	sZ	802.4	460	SupplierStandard	391	7
103102803270279	28	1,960	Galvanized	zS	802.4	460	SupplierStandard	391	7
103102804100279	28	2,160	Bright	sZ	864.7	460	SupplierStandard	391	7

103102803100279	28	2,160	Bright	zS	864.7	460	SupplierStandard	391	7
103102804300279	28	2,160	Galvanized	sZ	864.7	460	SupplierStandard	391	7
103102803300279	28	2,160	Galvanized	zS	864.7	460	SupplierStandard	391	7
103102904070279	29	1,960	Bright	sZ	860.7	493	SupplierStandard	419	7
103102903070279	29	1,960	Bright	zS	860.7	493	SupplierStandard	419	7
103102904270279	29	1,960	Galvanized	sZ	860.7	493	SupplierStandard	419	7
103102903270279	29	1,960	Galvanized	zS	860.7	493	SupplierStandard	419	7
103102904100279	29	2,160	Bright	sZ	927.5	493	SupplierStandard	419	7
103102903100279	29	2,160	Bright	zS	927.5	493	SupplierStandard	419	7
103102904300279	29	2,160	Galvanized	sZ	927.5	493	SupplierStandard	419	7
103102903300279	29	2,160	Galvanized	zS	927.5	493	SupplierStandard	419	7
103103004070279	30	1,960	Bright	sZ	921.1	528	SupplierStandard	448	7
103103003070279	30	1,960	Bright	zS	921.1	528	SupplierStandard	448	7
103103004270279	30	1,960	Galvanized	sZ	921.1	528	SupplierStandard	448	7
103103003270279	30	1,960	Galvanized	zS	921.1	528	SupplierStandard	448	7
103103004100279	30	2,160	Bright	sZ	992.6	528	SupplierStandard	448	7
103103003100279	30	2,160	Bright	zS	992.6	528	SupplierStandard	448	7
103103004300279	30	2,160	Galvanized	sZ	992.6	528	SupplierStandard	448	7
103103003300279	30	2,160	Galvanized	zS	992.6	528	SupplierStandard	448	7
103103104070279	31	1,960	Bright	sZ	983.5	564	SupplierStandard	479	7
103103103070279	31	1,960	Bright	zS	983.5	564	SupplierStandard	479	7
103103104270279	31	1,960	Galvanized	sZ	983.5	564	SupplierStandard	479	7
103103103270279	31	1,960	Galvanized	zS	983.5	564	SupplierStandard	479	7

103103104100279	31	2,160	Bright	sZ	1,066	564	SupplierStandard	479	7
103103103100279	31	2,160	Bright	zS	1,066	564	SupplierStandard	479	7
103103104300279	31	2,160	Galvanized	sZ	1,066	564	SupplierStandard	479	7
103103103300279	31	2,160	Galvanized	zS	1,066	564	SupplierStandard	479	7
103103204070279	32	1,960	Bright	sZ	1,048	601	SupplierStandard	510	7
103103203070279	32	1,960	Bright	zS	1,048	601	SupplierStandard	510	7
103103204270279	32	1,960	Galvanized	sZ	1,048	601	SupplierStandard	510	7
103103203270279	32	1,960	Galvanized	zS	1,048	601	SupplierStandard	510	7
103103204100279	32	2,160	Bright	sZ	1,129	601	SupplierStandard	510	7
103103203100279	32	2,160	Bright	zS	1,129	601	SupplierStandard	510	7
103103204300279	32	2,160	Galvanized	sZ	1,129	601	SupplierStandard	510	7
103103203300279	32	2,160	Galvanized	zS	1,129	601	SupplierStandard	510	7
103103304070279	33	1,960	Bright	sZ	1,115	639	SupplierStandard	542	7
103103303070279	33	1,960	Bright	zS	1,115	639	SupplierStandard	542	7
103103304270279	33	1,960	Galvanized	sZ	1,115	639	SupplierStandard	542	7
103103303270279	33	1,960	Galvanized	zS	1,115	639	SupplierStandard	542	7
103103304100279	33	2,160	Bright	sZ	1,201	639	SupplierStandard	542	7
103103303100279	33	2,160	Bright	zS	1,201	639	SupplierStandard	542	7
103103304300279	33	2,160	Galvanized	sZ	1,201	639	SupplierStandard	542	7
103103303300279	33	2,160	Galvanized	zS	1,201	639	SupplierStandard	542	7
103103404070279	34	1,960	Bright	sZ	1,183	678	SupplierStandard	576	7
103103403070279	34	1,960	Bright	zS	1,183	678	SupplierStandard	576	7
103103404270279	34	1,960	Galvanized	sZ	1,183	678	SupplierStandard	576	7

103103403270279	34	1,960	Galvanized	zS	1,183	678	SupplierStandard	576	7
103103404100279	34	2,160	Bright	sZ	1,275	678	SupplierStandard	576	7
103103403100279	34	2,160	Bright	zS	1,275	678	SupplierStandard	576	7
103103404300279	34	2,160	Galvanized	sZ	1,275	678	SupplierStandard	576	7
103103403300279	34	2,160	Galvanized	zS	1,275	678	SupplierStandard	576	7
103103504070279	35	1,960	Bright	sZ	1,254	719	SupplierStandard	610	7
103103503070279	35	1,960	Bright	zS	1,254	719	SupplierStandard	610	7
103103504270279	35	1,960	Galvanized	sZ	1,254	719	SupplierStandard	610	7
103103503270279	35	1,960	Galvanized	zS	1,254	719	SupplierStandard	610	7
103103504100279	35	2,160	Bright	sZ	1,351	719	SupplierStandard	610	7
103103503100279	35	2,160	Bright	zS	1,351	719	SupplierStandard	610	7
103103504300279	35	2,160	Galvanized	sZ	1,351	719	SupplierStandard	610	7
103103503300279	35	2,160	Galvanized	zS	1,351	719	SupplierStandard	610	7
103103604070279	36	1,960	Bright	sZ	1,326	760	SupplierStandard	646	7
103103603070279	36	1,960	Bright	zS	1,326	760	SupplierStandard	646	7
103103604270279	36	1,960	Galvanized	sZ	1,326	760	SupplierStandard	646	7
103103603270279	36	1,960	Galvanized	zS	1,326	760	SupplierStandard	646	7
103103604100279	36	2,160	Bright	sZ	1,429	760	SupplierStandard	646	7
103103603100279	36	2,160	Bright	zS	1,429	760	SupplierStandard	646	7
103103604300279	36	2,160	Galvanized	sZ	1,429	760	SupplierStandard	646	7
103103603300279	36	2,160	Galvanized	zS	1,429	760	SupplierStandard	646	7
103103804070279	38	1,960	Bright	sZ	1,478	847	SupplierStandard	719	7
103103803070279	38	1,960	Bright	zS	1,478	847	SupplierStandard	719	7

103103804270279	38	1,960	Galvanized	sZ	1,478	847	SupplierStandard	719	7
103103803270279	38	1,960	Galvanized	zS	1,478	847	SupplierStandard	719	7
103103804100279	38	2,160	Bright	sZ	1,593	847	SupplierStandard	719	7
103103803100279	38	2,160	Bright	zS	1,593	847	SupplierStandard	719	7
103103804300279	38	2,160	Galvanized	sZ	1,593	847	SupplierStandard	719	7
103103803300279	38	2,160	Galvanized	zS	1,593	847	SupplierStandard	719	7
103104004070279	40	1,960	Bright	sZ	1,637	939	SupplierStandard	797	7
103104003070279	40	1,960	Bright	zS	1,637	939	SupplierStandard	797	7
103104004270279	40	1,960	Galvanized	sZ	1,637	939	SupplierStandard	797	7
103104003270279	40	1,960	Galvanized	zS	1,637	939	SupplierStandard	797	7
103104004100279	40	2,160	Bright	sZ	1,765	939	SupplierStandard	797	7
103104003100279	40	2,160	Bright	zS	1,765	939	SupplierStandard	797	7
103104004300279	40	2,160	Galvanized	sZ	1,765	939	SupplierStandard	797	7
103104003300279	40	2,160	Galvanized	zS	1,765	939	SupplierStandard	797	7
103104204070279	42	1,960	Bright	sZ	1,805	1,035	SupplierStandard	879	7
103104203070279	42	1,960	Bright	zS	1,805	1,035	SupplierStandard	879	7
103104204270279	42	1,960	Galvanized	sZ	1,805	1,035	SupplierStandard	879	7
103104203270279	42	1,960	Galvanized	zS	1,805	1,035	SupplierStandard	879	7
103104204100279	42	2,160	Bright	sZ	1,946	1,035	SupplierStandard	879	7
103104203100279	42	2,160	Bright	zS	1,946	1,035	SupplierStandard	879	7
103104204300279	42	2,160	Galvanized	sZ	1,946	1,035	SupplierStandard	879	7
103104203300279	42	2,160	Galvanized	zS	1,946	1,035	SupplierStandard	879	7
103104404070279	44	1,960	Bright	sZ	1,981	1,136	SupplierStandard	964	7

103104403070279	44	1,960	Bright	zS	1,981	1,136	SupplierStandard	964	7
103104404270279	44	1,960	Galvanized	sZ	1,981	1,136	SupplierStandard	964	7
103104403270279	44	1,960	Galvanized	zS	1,981	1,136	SupplierStandard	964	7
103104404100279	44	2,160	Bright	sZ	2,135	1,136	SupplierStandard	964	7
103104403100279	44	2,160	Bright	zS	2,135	1,136	SupplierStandard	964	7
103104404300279	44	2,160	Galvanized	sZ	2,135	1,136	SupplierStandard	964	7
103104403300279	44	2,160	Galvanized	zS	2,135	1,136	SupplierStandard	964	7
103104504070279	45	1,960	Bright	sZ	2,072	1,188	SupplierStandard	1,009	7
103104503070279	45	1,960	Bright	zS	2,072	1,188	SupplierStandard	1,009	7
103104504270279	45	1,960	Galvanized	sZ	2,072	1,188	SupplierStandard	1,009	7
103104503270279	45	1,960	Galvanized	zS	2,072	1,188	SupplierStandard	1,009	7
103104504100279	45	2,160	Bright	sZ	2,233	1,188	SupplierStandard	1,009	7
103104503100279	45	2,160	Bright	zS	2,233	1,188	SupplierStandard	1,009	7
103104504300279	45	2,160	Galvanized	sZ	2,233	1,188	SupplierStandard	1,009	7
103104503300279	45	2,160	Galvanized	zS	2,233	1,188	SupplierStandard	1,009	7
103104604070279	46	1,960	Bright	sZ	2,166	1,241	SupplierStandard	1,054	7
103104603070279	46	1,960	Bright	zS	2,166	1,241	SupplierStandard	1,054	7
103104604270279	46	1,960	Galvanized	sZ	2,166	1,241	SupplierStandard	1,054	7
103104603270279	46	1,960	Galvanized	zS	2,166	1,241	SupplierStandard	1,054	7
103104604100279	46	2,160	Bright	sZ	2,334	1,241	SupplierStandard	1,054	7
103104603100279	46	2,160	Bright	zS	2,334	1,241	SupplierStandard	1,054	7
103104604300279	46	2,160	Galvanized	sZ	2,334	1,241	SupplierStandard	1,054	7
103104603300279	46	2,160	Galvanized	zS	2,334	1,241	SupplierStandard	1,054	7

103104804070279	48	1,960	Bright	sZ	2,358	1,352	SupplierStandard	1,148	7
103104803070279	48	1,960	Bright	zS	2,358	1,352	SupplierStandard	1,148	7
103104804270279	48	1,960	Galvanized	sZ	2,358	1,352	SupplierStandard	1,148	7
103104803270279	48	1,960	Galvanized	zS	2,358	1,352	SupplierStandard	1,148	7
103104804100279	48	2,160	Bright	sZ	2,541	1,352	SupplierStandard	1,148	7
103104803100279	48	2,160	Bright	zS	2,541	1,352	SupplierStandard	1,148	7
103104804300279	48	2,160	Galvanized	sZ	2,541	135	SupplierStandard	1,148	7
103104803300279	48	2,160	Galvanized	zS	2,541	1,352	SupplierStandard	1,148	7

Technical data