


## Anchor Point ABS - Lock X-Rivet

### Product information

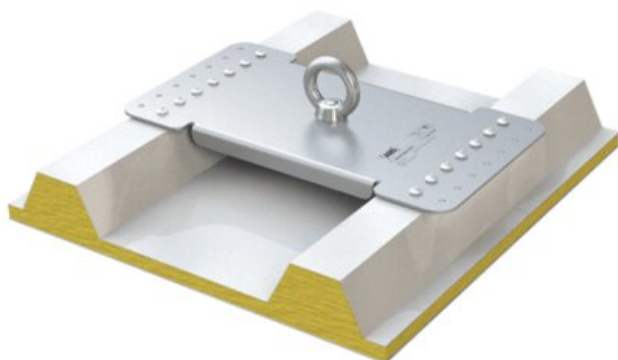

Anchorage point - designed for riveting onto sandwich and trapezoidal sheeting.  
Anchor point ABS-Lock X-Rivet is simply riveted on top of roof membrane using 14 watertight blind rivets.

The 2 different base plates can be used for different seam intervals.

- LX-SW-N-250 -> Distance between the holes: 180-250 mm
- LX-SW-N-333 -> Distance between the holes: 280-333 mm

Also available as an intermediate ("ZW") bracket in a lifeline system in 2 heights.

- LX-SW-N-...-ZW -> Bracket height 150 mm
- LX-SW-N-...-ZW-350 -> Bracket height 350 mm

For steel plating:  $\geq 0.45$  mm;  
Aluminium:  $\geq 0.8$  mm.

**Force directions:** Lateral.

**Substructure:** Sandwich, trapezoidal sheeting, profile roof.

**Attachment:** Riveted

**Application:** Profile Roof, flat roofs

**Material:** Stainless steel

**Marking:** According to standard

**Standard:** EN 795, CEN/TS/16415

**Note:** Installation materials included

<b>Part Code</b>	<b>Code</b>	<b>Max. number of persons</b>	<b>Weight kg</b>	<b>Delivery time</b>
8415LXSWN250	19.10LX-SW-N-250	3	2.012	7
8415LXSWN333	19.10LX-SW-N-333	3	2.129	7
8415LXSWN250ZW	19.10LX-SW-N-250-ZW	3	2.34	7
8415LXSWN333ZW	19.10LX-SW-N-333-ZW	3	2.457	7
8415LXSWN250ZW350	19.10LX-SW-N-250-ZW-350	3	2.712	7
8415LXSWN333ZW350	19.10LX-SW-N-333-ZW-350	3	2.829	7