


Steel wire rope - 6xK36WS-IWRC Compacted



Product information

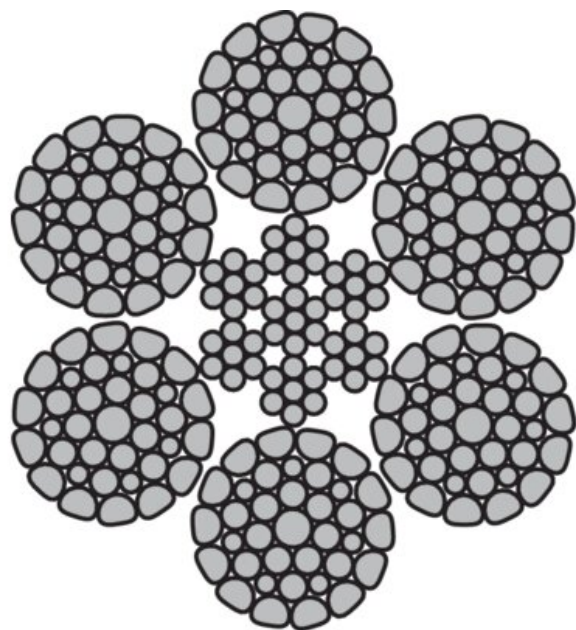

ISO 4309 Rope Category No: 10-40mm RCN.09

Rope construction: 6xK36WS-IWRC

Marking: According to standard

Standard: EN 12385-4

Fill factor: 0.64

RCN: 09

Winch rope



Tower crane



Container crane



Mobile port crane



Offshore crane



Loading crane




Crawler crane



Piling crane



Overhead cranes



Part Code	Rope Diameter, mm	Tensile strength N/mm ²	Finish	Rope lay.	Min. Breaking force, kN	Steel area mm ²	Lubrication	Weight kg/100m	Delivery time
103101004070049	10	1,960	Bright	sZ	84.2	50.3	SupplierStandard	45	7
103101003070049	10	1,960	Bright	zS	84.2	50.3	SupplierStandard	45	7
103101004270049	10	1,960	Galvanized	sZ	84.2	50.3	SupplierStandard	45	7
103101003270049	10	1,960	Galvanized	zS	84.2	50.3	SupplierStandard	45	7
103101004100049	10	2,160	Bright	sZ	89.6	50.3	SupplierStandard	45	7
103101003100049	10	2,160	Bright	zS	89.6	50.3	SupplierStandard	45	7
103101004300049	10	2,160	Galvanized	sZ	89.6	50.3	SupplierStandard	45	7
103101003300049	10	2,160	Galvanized	zS	89.6	50.3	SupplierStandard	45	7
103101204070049	12	1,960	Bright	sZ	118	72.5	SupplierStandard	65	7
103101203070049	12	1,960	Bright	zS	118	72.5	SupplierStandard	65	7
103101204270049	12	1,960	Galvanized	sZ	118	72.5	SupplierStandard	65	7
103101203270049	12	1,960	Galvanized	zS	118	72.5	SupplierStandard	65	7
103101204100049	12	2,160	Bright	sZ	126	72.5	SupplierStandard	65	7
103101203100049	12	2,160	Bright	zS	126	72.5	SupplierStandard	65	7
103101204300049	12	2,160	Galvanized	sZ	126	72.5	SupplierStandard	65	7
103101203300049	12	2,160	Galvanized	zS	126	72.5	SupplierStandard	65	7
103101304070049	13	1,960	Bright	sZ	138	85	SupplierStandard	76	7
103101303070049	13	1,960	Bright	zS	138	85	SupplierStandard	76	7
103101304270049	13	1,960	Galvanized	sZ	138	85	SupplierStandard	76	7
103101303270049	13	1,960	Galvanized	zS	138	85	SupplierStandard	76	7
103101304100049	13	2,160	Bright	sZ	147	85	SupplierStandard	76	7

103101303100049	13	2,160	Bright	zS	147	85	SupplierStandard	76	7
103101304300049	13	2,160	Galvanized	sZ	147	85	SupplierStandard	76	7
103101303300049	13	2,160	Galvanized	zS	147	85	SupplierStandard	76	7
103101404070049	14	1,960	Bright	sZ	169	96.6	SupplierStandard	89	7
103101403070049	14	1,960	Bright	zS	169	96.6	SupplierStandard	89	7
103101404270049	14	1,960	Galvanized	sZ	169	96.6	SupplierStandard	89	7
103101403270049	14	1,960	Galvanized	zS	169	96.6	SupplierStandard	89	7
103101404100049	14	2,160	Bright	sZ	179	96.6	SupplierStandard	89	7
103101403100049	14	2,160	Bright	zS	179	96.6	SupplierStandard	89	7
103101404300049	14	2,160	Galvanized	sZ	179	96.6	SupplierStandard	89	7
103101403300049	14	2,160	Galvanized	zS	179	96.6	SupplierStandard	89	7
103101604070049	16	1,960	Bright	sZ	210	129	SupplierStandard	116	7
103101603070049	16	1,960	Bright	zS	210	129	SupplierStandard	116	7
103101604270049	16	1,960	Galvanized	sZ	210	129	SupplierStandard	116	7
103101603270049	16	1,960	Galvanized	zS	210	129	SupplierStandard	116	7
103101604100049	16	2,160	Bright	sZ	224	129	SupplierStandard	116	7
103101603100049	16	2,160	Bright	zS	224	129	SupplierStandard	116	7
103101604300049	16	2,160	Galvanized	sZ	224	129	SupplierStandard	116	7
103101603300049	16	2,160	Galvanized	zS	224	129	SupplierStandard	116	7
103101804070049	18	1,960	Bright	sZ	266	163	SupplierStandard	147	7
103101803070049	18	1,960	Bright	zS	266	163	SupplierStandard	147	7
103101804270049	18	1,960	Galvanized	sZ	266	163	SupplierStandard	147	7
103101803270049	18	1,960	Galvanized	zS	266	163	SupplierStandard	147	7

103101804100049	18	2,160	Bright	sZ	283	163	SupplierStandard	147	7
103101803100049	18	2,160	Bright	zS	283	163	SupplierStandard	147	7
103101804300049	18	2,160	Galvanized	sZ	283	163	SupplierStandard	147	7
103101803300049	18	2,160	Galvanized	zS	283	163	SupplierStandard	147	7
103101904070049	19	1,960	Bright	sZ	299	182	SupplierStandard	164	7
103101903070049	19	1,960	Bright	zS	299	182	SupplierStandard	164	7
103101904270049	19	1,960	Galvanized	sZ	299	182	SupplierStandard	164	7
103101903270049	19	1,960	Galvanized	zS	299	182	SupplierStandard	164	7
103101904100049	19	2,160	Bright	sZ	319	182	SupplierStandard	164	7
103101903100049	19	2,160	Bright	zS	319	182	SupplierStandard	164	7
103101904300049	19	2,160	Galvanized	sZ	319	182	SupplierStandard	164	7
103101903300049	19	2,160	Galvanized	zS	319	182	SupplierStandard	164	7
103102004070049	20	1,960	Bright	sZ	328	201	SupplierStandard	182	7
103102003070049	20	1,960	Bright	zS	328	201	SupplierStandard	182	7
103102004270049	20	1,960	Galvanized	sZ	328	201	SupplierStandard	182	7
103102003270049	20	1,960	Galvanized	zS	328	201	SupplierStandard	182	7
103102004100049	20	2,160	Bright	sZ	349	201	SupplierStandard	182	7
103102003100049	20	2,160	Bright	zS	349	201	SupplierStandard	182	7
103102004300049	20	2,160	Galvanized	sZ	349	201	SupplierStandard	182	7
103102003300049	20	2,160	Galvanized	zS	349	201	SupplierStandard	182	7
103102204070049	22	1,960	Bright	sZ	397	244	SupplierStandard	220	7
103102203070049	22	1,960	Bright	zS	397	244	SupplierStandard	220	7
103102204270049	22	1,960	Galvanized	sZ	397	244	SupplierStandard	220	7

103102203270049	22	1,960	Galvanized	zS	397	244	SupplierStandard	220	7
103102204100049	22	2,160	Bright	sZ	424	244	SupplierStandard	220	7
103102203100049	22	2,160	Bright	zS	424	244	SupplierStandard	220	7
103102204300049	22	2,160	Galvanized	sZ	424	244	SupplierStandard	220	7
103102203300049	22	2,160	Galvanized	zS	424	244	SupplierStandard	220	7
103102404070049	24	1,960	Bright	sZ	473	290	SupplierStandard	262	7
103102403070049	24	1,960	Bright	zS	473	290	SupplierStandard	262	7
103102404270049	24	1,960	Galvanized	sZ	473	290	SupplierStandard	262	7
103102403270049	24	1,960	Galvanized	zS	473	290	SupplierStandard	262	7
103102404100049	24	2,160	Bright	sZ	504	290	SupplierStandard	262	7
103102403100049	24	2,160	Bright	zS	504	290	SupplierStandard	262	7
103102404300049	24	2,160	Galvanized	sZ	504	290	SupplierStandard	262	7
103102403300049	24	2,160	Galvanized	zS	504	290	SupplierStandard	262	7
103102504070049	25	1,960	Bright	sZ	513	315	SupplierStandard	284	7
103102503070049	25	1,960	Bright	zS	513	315	SupplierStandard	284	7
103102504270049	25	1,960	Galvanized	sZ	513	315	SupplierStandard	284	7
103102503270049	25	1,960	Galvanized	zS	513	315	SupplierStandard	284	7
103102504100049	25	2,160	Bright	sZ	547	315	SupplierStandard	284	7
103102503100049	25	2,160	Bright	zS	547	315	SupplierStandard	284	7
103102504300049	25	2,160	Galvanized	sZ	547	315	SupplierStandard	284	7
103102503300049	25	2,160	Galvanized	zS	547	315	SupplierStandard	284	7
103102604070049	26	1,960	Bright	sZ	555	340	SupplierStandard	307	7
103102603070049	26	1,960	Bright	zS	555	340	SupplierStandard	307	7

103102604270049	26	1,960	Galvanized	sZ	555	340	SupplierStandard	307	7
103102603270049	26	1,960	Galvanized	zS	555	340	SupplierStandard	307	7
103102604100049	26	2,160	Bright	sZ	592	340	SupplierStandard	307	7
103102603100049	26	2,160	Bright	zS	592	340	SupplierStandard	307	7
103102604300049	26	2,160	Galvanized	sZ	592	340	SupplierStandard	307	7
103102603300049	26	2,160	Galvanized	zS	592	340	SupplierStandard	307	7
103102804070049	28	1,960	Bright	sZ	643	395	SupplierStandard	356	7
103102803070049	28	1,960	Bright	zS	643	395	SupplierStandard	356	7
103102804270049	28	1,960	Galvanized	sZ	643	395	SupplierStandard	356	7
103102803270049	28	1,960	Galvanized	zS	643	395	SupplierStandard	356	7
103102804100049	28	2,160	Bright	sZ	686	395	SupplierStandard	356	7
103102803100049	28	2,160	Bright	zS	686	395	SupplierStandard	356	7
103102804300049	28	2,160	Galvanized	sZ	686	395	SupplierStandard	356	7
103102803300049	28	2,160	Galvanized	zS	686	395	SupplierStandard	356	7
103103004070049	30	1,960	Bright	sZ	739	453	SupplierStandard	409	7
103103003070049	30	1,960	Bright	zS	739	453	SupplierStandard	409	7
103103004270049	30	1,960	Galvanized	sZ	739	453	SupplierStandard	409	7
103103003270049	30	1,960	Galvanized	zS	739	453	SupplierStandard	409	7
103103004100049	30	2,160	Bright	sZ	788	453	SupplierStandard	409	7
103103003100049	30	2,160	Bright	zS	788	453	SupplierStandard	409	7
103103004300049	30	2,160	Galvanized	sZ	788	453	SupplierStandard	409	7
103103003300049	30	2,160	Galvanized	zS	788	453	SupplierStandard	409	7
103103204070049	32	1,960	Bright	sZ	840	515	SupplierStandard	465	7

103103203070049	32	1,960	Bright	zS	840	515	SupplierStandard	465	7
103103204270049	32	1,960	Galvanized	sZ	840	515	SupplierStandard	465	3
103103203270049	32	1,960	Galvanized	zS	840	515	SupplierStandard	465	3
103103204100049	32	2,160	Bright	sZ	897	515	SupplierStandard	465	7
103103203100049	32	2,160	Bright	zS	897	515	SupplierStandard	465	7
103103204300049	32	2,160	Galvanized	sZ	897	515	SupplierStandard	465	7
103103203300049	32	2,160	Galvanized	zS	897	515	SupplierStandard	465	7
103103404070049	34	1,960	Bright	sZ	949	582	SupplierStandard	525	7
103103403070049	34	1,960	Bright	zS	949	582	SupplierStandard	525	7
103103404270049	34	1,960	Galvanized	sZ	949	582	SupplierStandard	525	7
103103403270049	34	1,960	Galvanized	zS	949	582	SupplierStandard	525	7
103103404100049	34	2,160	Bright	sZ	1,010	582	SupplierStandard	525	7
103103403100049	34	2,160	Bright	zS	1,010	582	SupplierStandard	525	7
103103404300049	34	2,160	Galvanized	sZ	1,010	582	SupplierStandard	525	7
103103403300049	34	2,160	Galvanized	zS	1,010	582	SupplierStandard	525	7
103103504070049	35	1,960	Bright	sZ	1,010	616	SupplierStandard	557	7
103103503070049	35	1,960	Bright	zS	1,010	616	SupplierStandard	557	7
103103504270049	35	1,960	Galvanized	sZ	1,010	616	SupplierStandard	557	7
103103503270049	35	1,960	Galvanized	zS	1,010	616	SupplierStandard	557	7
103103504100049	35	2,160	Bright	sZ	1,069	616	SupplierStandard	557	7
103103503100049	35	2,160	Bright	zS	1,069	616	SupplierStandard	557	7
103103504300049	35	2,160	Galvanized	sZ	1,069	616	SupplierStandard	557	7
103103503300049	35	2,160	Galvanized	zS	1,069	616	SupplierStandard	557	7

103103604070049	36	1,960	Bright	sZ	1,069	652	SupplierStandard	589	7
103103603070049	36	1,960	Bright	zS	1,069	652	SupplierStandard	589	7
103103604270049	36	1,960	Galvanized	sZ	1,069	652	SupplierStandard	589	7
103103603270049	36	1,960	Galvanized	zS	1,069	652	SupplierStandard	589	7
103103604100049	36	2,160	Bright	sZ	1,138	652	SupplierStandard	589	7
103103603100049	36	2,160	Bright	zS	1,138	652	SupplierStandard	589	7
103103604300049	36	2,160	Galvanized	sZ	1,138	652	SupplierStandard	589	7
103103603300049	36	2,160	Galvanized	zS	1,138	652	SupplierStandard	589	7
103103804070049	38	1,960	Bright	sZ	1,187	727	SupplierStandard	656	7
103103803070049	38	1,960	Bright	zS	1,187	727	SupplierStandard	656	7
103103804270049	38	1,960	Galvanized	sZ	1,187	727	SupplierStandard	656	7
103103803270049	38	1,960	Galvanized	zS	1,187	727	SupplierStandard	656	7
103103804100049	38	2,160	Bright	sZ	1,265	727	SupplierStandard	656	7
103103803100049	38	2,160	Bright	zS	1,265	727	SupplierStandard	656	7
103103804300049	38	2,160	Galvanized	sZ	1,265	727	SupplierStandard	656	7
103103803300049	38	2,160	Galvanized	zS	1,265	727	SupplierStandard	656	7
103104004070049	40	1,960	Bright	sZ	1,314	805	SupplierStandard	727	7
103104003070049	40	1,960	Bright	zS	1,314	805	SupplierStandard	727	7
103104004270049	40	1,960	Galvanized	sZ	1,314	805	SupplierStandard	727	7
103104003270049	40	1,960	Galvanized	zS	1,314	805	SupplierStandard	727	7
103104004100049	40	2,160	Bright	sZ	1,402	805	SupplierStandard	727	7
103104003100049	40	2,160	Bright	zS	1,402	805	SupplierStandard	727	7
103104004300049	40	2,160	Galvanized	sZ	1,402	805	SupplierStandard	727	7

103104003300049

40

2,160

Galvanized

zS

1,402

805

SupplierStandard

727

7